



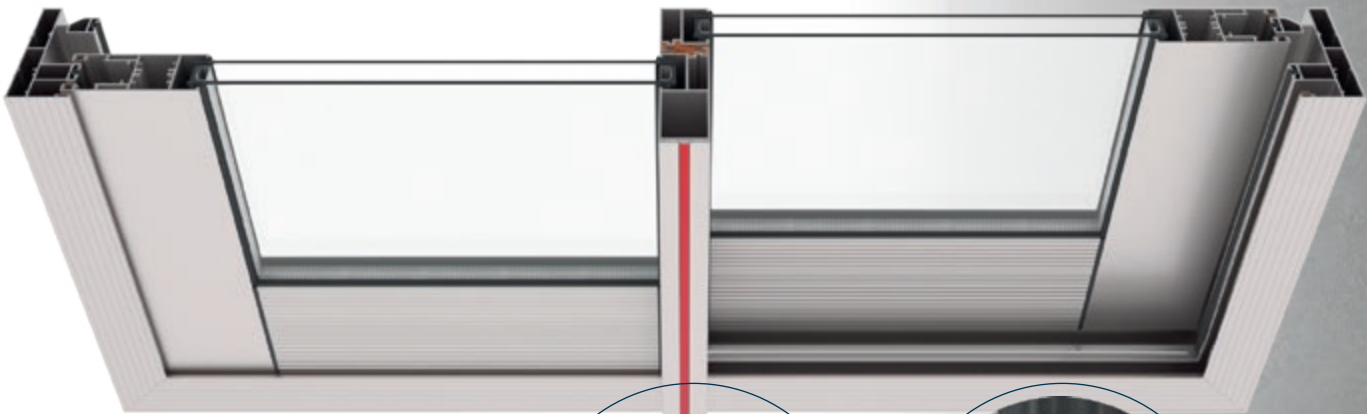

"Effortless Sliding,
Timeless Design."




SPECIAL FLYSCREEN DETAIL

TECHNICAL SPECIFICATIONS	
SASH WIDTH	38 mm
SASH LENGTH	92,5 mm
PROFILE THICKNESS	1,3 -1,8 mm
GLASS THICKNESS	20-26 mm
MAX. CARRYING CAPACITY	120 kg

APPLICATION FEATURES	
SPECIAL STEEL RAIL	✓
FLY SCREEN	✓
MULTI LOCK APPLICATION	✓
EASE OF USE AND FUNCTIONALITY	✓
MINIMAL MIDDLE SASH	✓
45° AND 90° SASH JOINT	✓
3 TRACK FRAME	✓
MONO RAIL FRAME	✓

- **Heavy-Duty Bearing System**
High-performance bearings ensure smooth and durable sash movement, even under heavy loads.
- **Multi-Point Locking Options**
Compatible with single or multiple locking mechanisms integrated within the sliding sash.
- **Integrated Fly Screen System**
The frame is designed with a built-in fly screen netting solution for added comfort and protection.

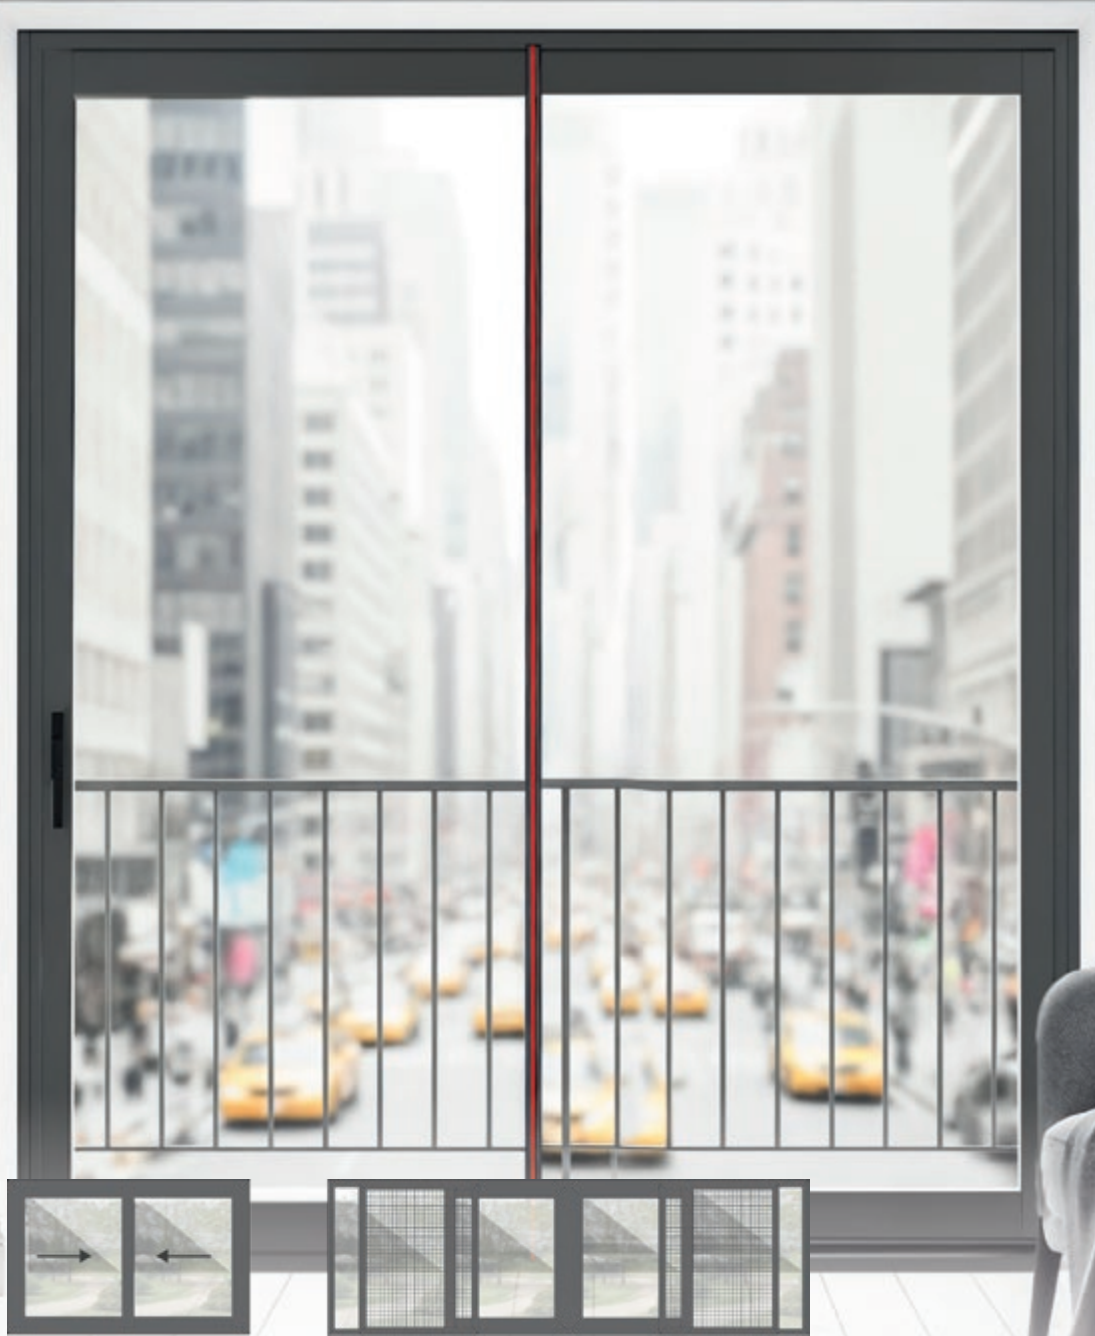

EASE OF
INSTALLATION



FLY SCREEN
DESIGN