




PIATTA
HBSB
HANDLE

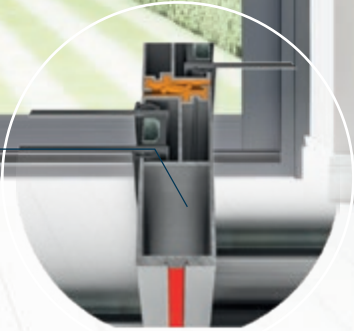

POLYAMIDE PROFILED HALLOW
CENTER DETAIL

TECHNICAL SPECIFICATIONS

SASH WIDTH	38 mm
SASH LENGTH	94 mm
PROFILE THICKNESS	2 mm
GLASS THICKNESS	21-25 mm
MAX. CARRYING CAPACITY	118 kg

APPLICATION FEATURES

WATER, AIR INSULATION	✓
ENERGY SAVINGS	✓
SPECIAL STEEL RAIL	✓
FLY SCREEN	✓
MULTI LOCK APPLICATION	✓
EASE OF USE AND FUNCTIONALITY	✓
MONO RAIL FRAME	✓
3 TRACK FRAME	✓
45° AND 90° SASH JOINT	✓

- **Heavy-Duty Bearing System**
High-performance bearings ensure smooth and durable sash movement, even under heavy loads.
- **Multi-Point Locking Options**
Compatible with single or multiple locking mechanisms integrated within the sliding sash.
- **Integrated Fly Screen System**
The frame is designed with a built-in fly screen netting solution for added comfort and protection.



SOUND
PERFORMANCE



WATER
ISOLATION



EASE OF
INSTALLATION



FLY SCREEN
DESIGN

